


Calarook

Stage Rider

Venue	Venue or Calarook	Calarook
Microphones <ul style="list-style-type: none"> 2x Backing Vocals 1x Snare 1x Hi-Hat 3x Tom 2x Overhead (OH) Inputs <ul style="list-style-type: none"> 1x XLR Lead Vocals 1x XLR Guitar 2x XLR Bass 1x XLR Violin 1x XLR for Samples 2x XLR for Backings Sample 1x XLR for Guitar 2 Sample 1x XLR for Trigger Other <ul style="list-style-type: none"> 2x Mic Stand 	Drum kit <ul style="list-style-type: none"> Tom 12" Tom 13" Tom 16" Carpet 200 x 150 cm Cymbal Stands 	<ul style="list-style-type: none"> Back drop 2x Side drops Kemper Guitar Profiling Amplifier Darkglass Microtube 900 Darkglass ADAM Bass Effekt Bass 22" (Trigger Pad Only) Snare 14" Hi-Hat 14" China 18" China 16" Crash 17" Crash 18" Ride 20" 2x Splash Drum Pad Drum Pedal Drum Chair Shure SM58 Wireless Mic Stage Rack



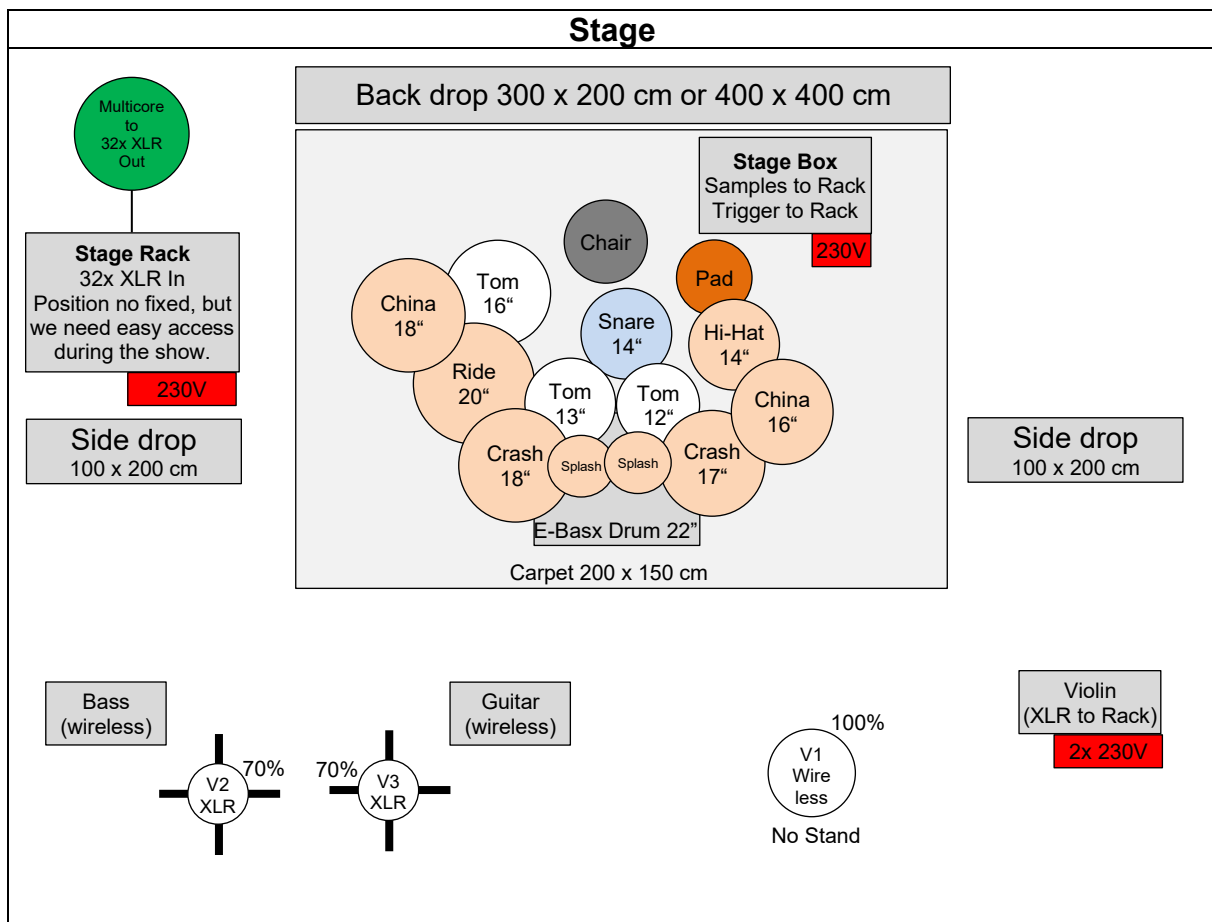

Channel List Stage Rack

The phantom supplies are provided by our rack.

Channel	Signal	Phantom
1	Bass Drum	YES
2	Snare	NO
3	Tom 1	NO
4	Tom 2	NO
5	Floor Tom	NO
6	Hi-Hat	NO
7	Overhead L	NO
8	Overhead R	NO
9	Bass Effect	NO
10	Bass DI	NO
11	Guitar 1	NO
12	Guitar 2	YES
13	Vox Philipp	NO
14	Vox Flavio	NO
15	Vox Niko	NO
16	Violin	YES
17	Samples	YES
18	-	-
19	Backing Vox L	YES
20	Backing Vox R	YES
21	-	-
22	-	-
23	-	-
24	-	-
25	-	-
26	-	-
27	-	-
28	-	-
29	-	-
30	-	-
31	-	-
32	-	-
A	FOH Talkback	-



Tech crew

Calarook does not have an own tech crew. If you have no own sound engineer, please contact us!

Wireless Systems

Lead Vocals, Violin, Guitar and Bass are using Wireless Systems. Models are listed below. If necessary, please provide the settings we have to make.

- 1x Shure GLXD24R+ (GLXD2+ / GLXD4R+) - Dual Band: 2.4 GHz and 5.8 GHz
- 2x Sennheiser ew 500 G4-Ci 1 DW (SK 500 G4 / EM 300-500 G4) - Band 790-865 MHz
- 4x Sennheiser ew IEM G4 E-Band (EK IEM G4 / SR IEM G4) – Band 823 – 865 MHz