


Calarook

Stage Rider

Venue	Calarook
Microphones	
<ul style="list-style-type: none"> • 2x Backing Vocals • 1x Snare • 1x Hi-Hat • 3x Tom • 2x Overhead (OH) 	<ul style="list-style-type: none"> • Back drop • 2x Side drops • 3x Ego Riser
Inputs	
<ul style="list-style-type: none"> • 1x XLR Lead Vocals • 1x XLR Guitar • 2x XLR Bass • 1x XLR Violin • 1x XLR for Samples • 1x XLR for Backing Vocal Samples • 1x XLR for Guitar 2 Sample • 1x XLR for E-Bass Drum / Pad 	<ul style="list-style-type: none"> • Complete Drums <ul style="list-style-type: none"> • Bass Drum Trigger Pad Only • Stage Rack w/ IEM <ul style="list-style-type: none"> • Shure SM58 Wireless Mic • Kemper Guitar Profiling Amplifier • Darkglass Microtube 900 • Darkglass ADAM Bass Effekt
Other	
<ul style="list-style-type: none"> • 2x Mic Stand 	



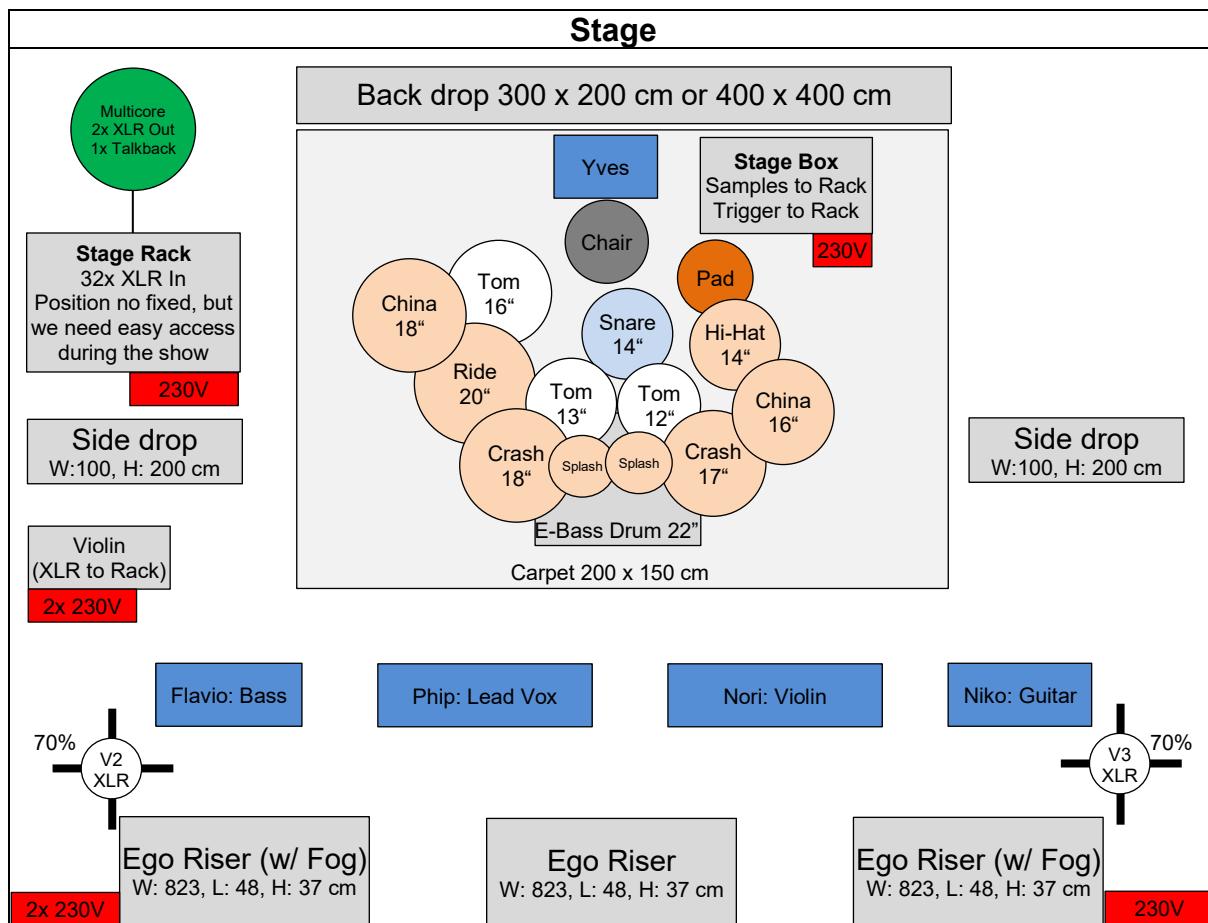

Channel List Stage Rack

The phantom supplies are provided by our rack.

Channel	Signal	Phantom
1	Bass Drum	YES
2	Snare	Defined by Venue
3	Tom 1	Defined by Venue
4	Tom 2	Defined by Venue
5	Floor Tom	Defined by Venue
6	Hi-Hat	Defined by Venue
7	Overhead L	Defined by Venue
8	Overhead R	Defined by Venue
9	Bass Effect	NO
10	Bass DI	NO
11	Guitar 1	NO
12	Guitar 2	YES
13	Vox Philipp	NO
14	Vox Flavio	NO
15	Vox Niko	NO
16	Violin	YES
17	Samples	YES
18	-	-
19	Backing Vox	YES
20	-	
21	Missing Bandmember	YES
22	-	-
23	-	-
24	-	-
25	-	-
26	-	-
27	-	-
28	-	-
29	-	-
30	-	-
31	-	-
32	-	-
A	FOH Talkback	-



Tech crew

Calarook does not have an own tech crew. If you have no own sound engineer, please contact us!

Wireless Systems

All band members are using wireless systems. Models are listed below. If necessary, please provide the settings we have to make.

- 1x Shure GLXD24R+ (GLXD2+ / GLXD4R+) - Dual Band: 2.4 GHz and 5.8 GHz
- 3x Sennheiser ew 500 G4-Ci 1 DW (SK 500 G4 / EM 300-500 G4) - Band 790-865 MHz
- 5x Sennheiser ew IEM G4 E-Band (EK IEM G4 / SR IEM G4) – Band 823 – 865 MHz